

Electronic Exposed Solar TECK® Flush Valves

TECK
COMMERCIAL


DELTA

81T201SP-DF-MMO

Exposed Solar Flush Valve
1-1/2" Top Inlet Closet Fixture

- Polished chrome-plated vandal resistant metal cover with top mounted electronic sensor and solar module
- **True mechanical manual override button (MMO)**
- Override button activation will always produce a full flush
- Right or left-hand supply installation
- ADA compliant, automatic operation with infrared sensor
- Designed for indoor lighting conditions and will operate in high or low brightness levels
- Compatible in environments with occupancy lighting
- Scratch resistant lens window
- Four (4) size AA alkaline batteries factory installed (required and included) with valve in shipping mode for easy installation
- Battery strength indicator with low battery warning light
- Supplied with an advanced infrared sensor activated flush system that uses multiple detection distances along with a bowl length setting to react appropriately to different usage patterns
- Optional 24 hour automatic flush factory set to OFF
- Set-up sensor range adjustment indicator lights
- 6 second arming delay
- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Renewable seat
- Polished chrome-plated body
- **External water conserving flush adjustment**, factory set to 6 Lpf (1.6 gpf)
- Optional flush setting capability factory set to "ON" providing average 30% water reduced flush based on time and distance
- **1" FIP/Copper sweat inlet adaptor**, angle check stop with protecting cap
- Adjustable 121 mm (4-3/4") plus or minus 11 mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube, wall flange, spud flange, concealed spud nut, and 292 mm (11-1/2") outlet tube
- **Recommended water supply:**
Minimum flowing pressure – 25 psi (172 kPa)
Minimum flow rate – 25 gpm (95 L/min)

APPROVALS:

- IAPMO listed to ASSE 1037/ASME A112.1037/CSA B125.37
-  Indicates compliance to ICC/ANSI A117.1

(Contact Delta Representative for State and/or Local Approvals.)

Patented




Engineer/Architect Approval

Model Specified:

Approval:

Date:

81T201SP-DF-MMO

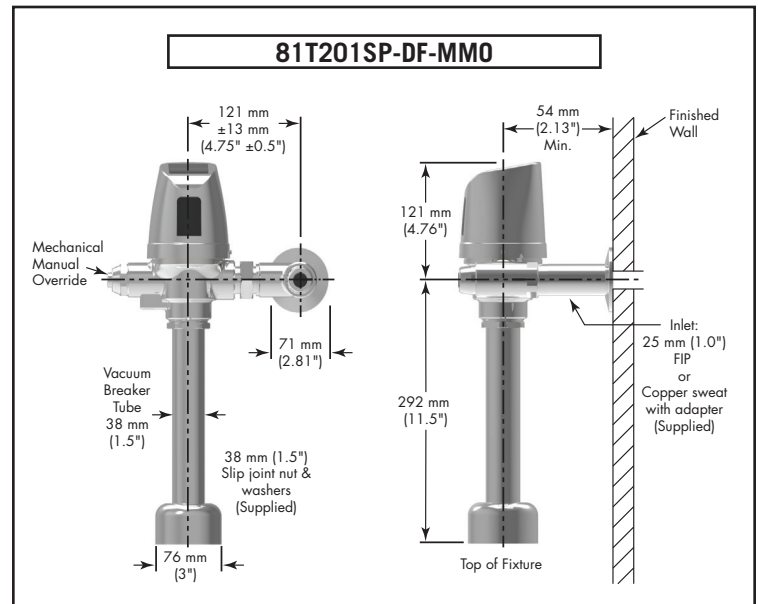

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.
Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-81T201SP-DF-MMO Rev. A