

Submitted Model No.: _____

Specific Features: _____



PALM® SHOWER

- Push Button Selection
- 60-82" Stretchable Metal Hose

STANDARD SPECIFICATIONS:


- Maximum 2.50 gpm @ 80 psi, 9.50 L/min @ 552 kPa
- Change spray modes with pushbutton
- 60-82" stretchable hose: (52008-▲DS, 53001-▲DS & 54456-▲PK)
- Includes double check valves for backflow prevention
- ADA compliant grab bar with concealed screw mounting system: (52008-▲DS, 53001-▲DS)
- Hand held shower with four spray settings, not a positive shut-off

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ♦
-  Indicates compliance to ICC/ANSI A117.

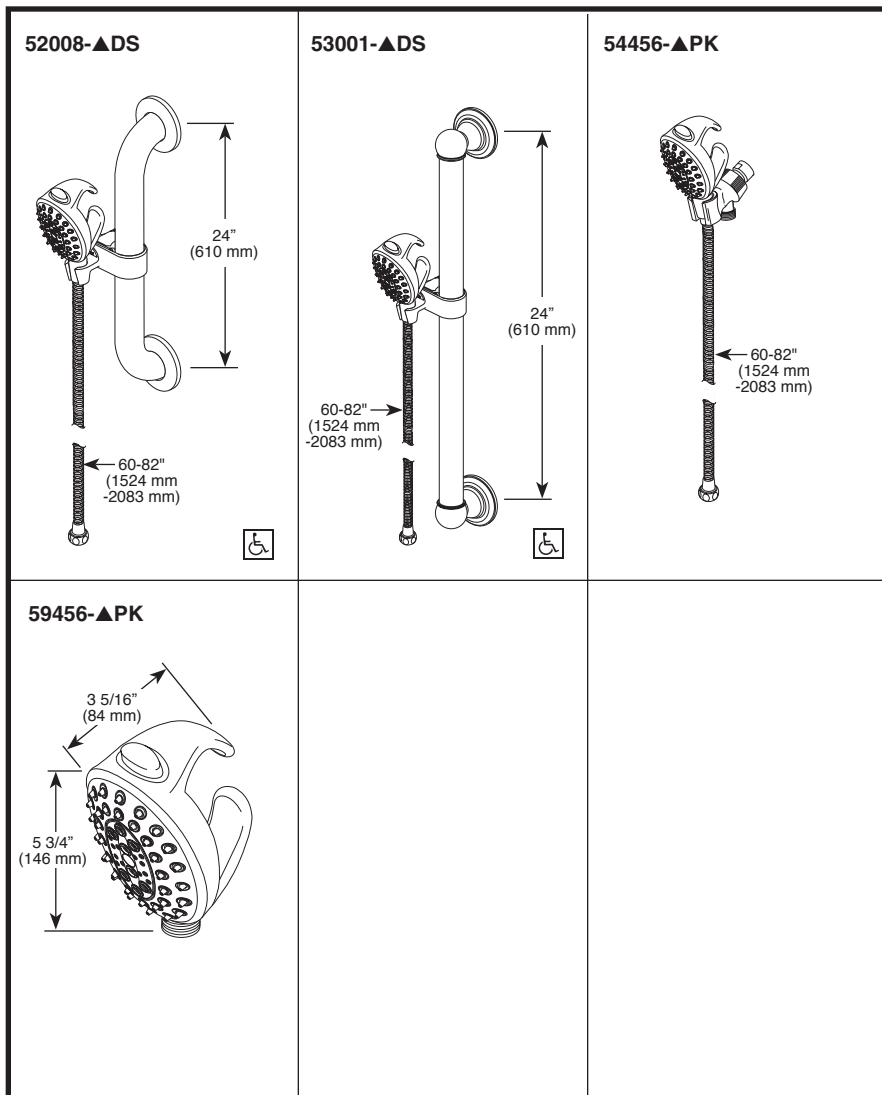


▲ Designate proper finish suffix

- ◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-52008-DS Rev. C

Spray Patterns

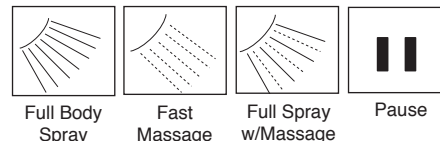

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2016 Masco Corporation of Indiana